
FRONT VIEW

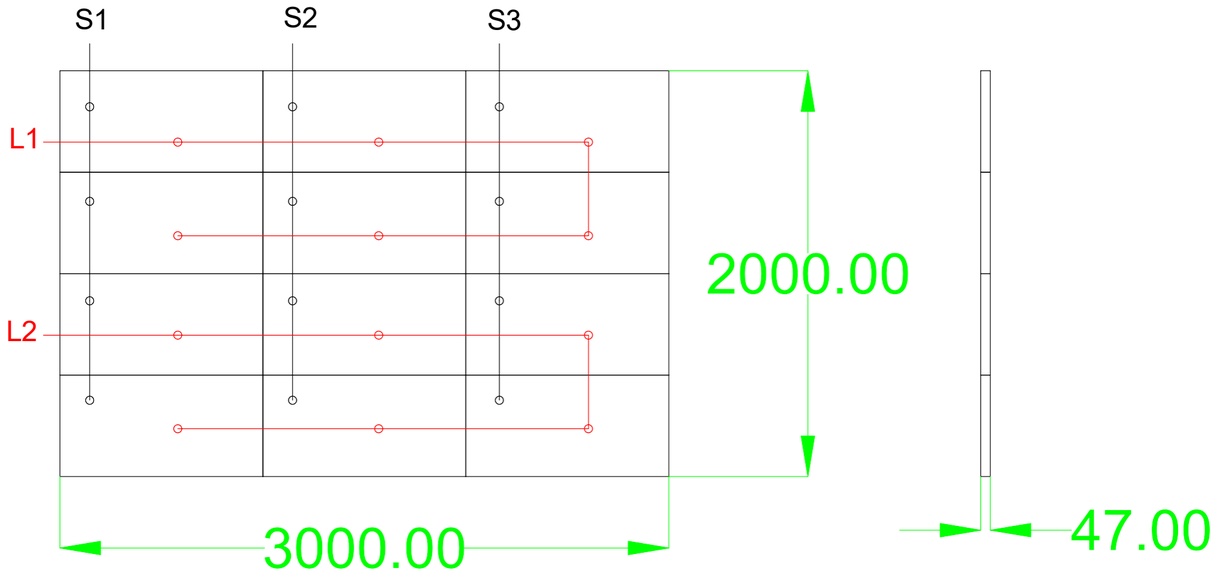

LEDWALL M4 LINATE DIGITAL WINDOW
3000x2000 mm P1.9

VM.i.GX 1.9
- 2 × Power lines (L1+L2): 3 × 2.5 mm² cables, each fitted with a 16A Type D circuit breaker at the electrical panel. Cables must be unterminated, with an additional 3 metres of cable length at the LED wall.
- 3 × CAT5/6 data lines (S1+S2+S3): with an additional 3 metres of cable length at the LED wall.

Maximum Total Power Consumption: 3.84 kW
Resolution: 1536 × 1024 pixels
Total Weight: 150 kg (excluding supporting structure)

Technical Room Rack Requirements
- 3 × CAT5 cables running from the LED wall
- 1 × Power strip with at least 6 sockets
- 1 × MCTRL 600 Controller